



VHF MARINE TRANSCEIVERS

IC-M3A IC-M3EURO



Reliable communications made easy

Water-resistant construction*

Sea spray? Rain? No need to worry with the IC-M3A. Water-resistant, non-corrosive construction, including water-tight gaskets for the control knob and antenna connector, ensures reliable communication out on the water.

*Equivalent to JIS water protection specification 4.

Simple operation

Well spaced, clearly labelled buttons on the front panel provide easy one-hand access to frequently used functions. The simple push of one button controls each function. Channel selection is a snap with the up/down keys.

Large LCD with backlighting

The extra large LCD shows operating status at a glance. Superior contrast and backlighting make viewing easy on your eyes. And with key backlighting, operation at night is not a problem.

'Tag' scan system

Icom's 'tag' scan system makes scanning easy—add or delete channels at the push of a button.

Alkaline battery ready

Alkaline batteries can be used as a convenient backup to rechargeable Ni-Cd batteries. While you're charging your Ni-Cd's throw in some alkaline batteries for temporary operation. Keep an extra set of "AA" alkaline batteries on board for emergencies.

5 W output power

When using Ni-Cd batteries the IC-M3A produces a powerful 5 W of output power.

Other features

- One-touch selection of channel 16 and channel 9
- Dual watch and tri-watch—monitor channel 16 while operating on another channel or monitor channel 16 and channel 9 while operating on another channel
- Receives weather channels and has a weather alert function that alerts you to emergency NOAA broadcasts
- Compact size

Icom Inc.

SPECIFICATIONS

GENERAL

- Frequency range
 - Tx 156.025–157.425 MHz
 - Rx 156.025–163.275 MHz
- Usable channels : All USA, international and Canadian channels plus 10 weather channels*
*USA version only.
- Mode : 16K0G3E (FM)
- Power supply requirement : 7.2 V DC (negative ground)
- Current drain (at 7.2 V DC; typical)
 - Tx at 5 W 1.6 A
 - at 1 W 0.7 A
 - Rx max. audio 230 mA
 - standby 60 mA (squelched)
 - power saved 20 mA (average)
- Usable temperature range : –20°C to +60°C; –4°F to +140°F
- Frequency stability : ±10 ppm (–20°C to +60°C)
- Dimensions (projections not included) : 58(W)×140.5(H)×43.5(D) mm
2⁹/₃₂(W)×5¹⁷/₃₂(H)×1²³/₃₂(D) in
- Weight : 410 g; 14.4 oz

TRANSMITTER

- Output power (at 7.2 V DC) : High 5 W Low 1 W
(3/1 W Italy, 1/0.5 W France, Holland versions)
- Modulation system : Variable reactance modulation
- Max. frequency deviation : ±5.0 kHz
- Spurious emissions : Less than –65 dB
- Microphone impedance : 2 kΩ

RECEIVER

- Receive system : Double-conversion superheterodyne
- Intermediate frequencies
 - 1st 31.05 MHz
 - 2nd 450 kHz
- Sensitivity (at 12 dB SINAD) : 0.25 µV typical
- Squelch sensitivity : 0.25 µV typical
- Intermodulation rejection : 70 dB typical
- Adjacent channel selectivity : 70 dB typical
- Spurious response rejection ratio : 70 dB typical
- Audio output power : 500 mW typical at 10% distortion with an 8 Ω load
- Audio output impedance : 8 Ω

The IC-M3A meets MIL-STD requirement and strict environmental standards for shock (MIL 810C, D, E) and vibration (MIL 810C, D, E).

Supplied accessories

- Battery case w/Ni-Cd cells
- Antenna
- Belt clip
- Wall charger*
- Handstrap
- *depending on version

All stated specifications are subject to change without notice or obligations.

OPTIONS

BP-204 BATTERY CASE

Takes 6 R6(AA) batteries. Both alkaline or Ni-Cd batteries can be used. The same as supplied.

CP-12L CIGARETTE LIGHTER CABLE WITH NOISE FILTER

OPC-254L DC POWER CABLE

Allow you to charge the transceiver through a 12 V cigarette lighter socket with the CP-12L or OPC-254L, respectively.

BC-131A WALL CHARGER


Regularly charges Ni-Cd batteries in the BP-204. The same as supplied with the USA version.

BC-110D/V WALL CHARGER


Regularly charges Ni-Cd batteries in the BP-204. The same as supplied with some versions.

MB-68 BELT CLIP

Allows you to attach the transceiver to your belt, etc. The same as supplied.

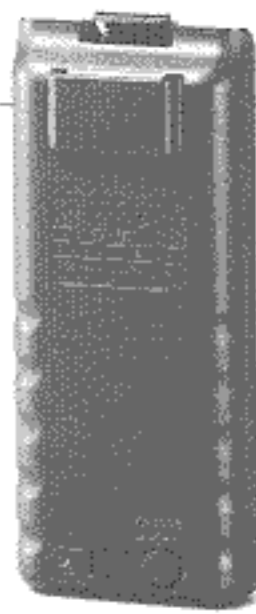

BP-204

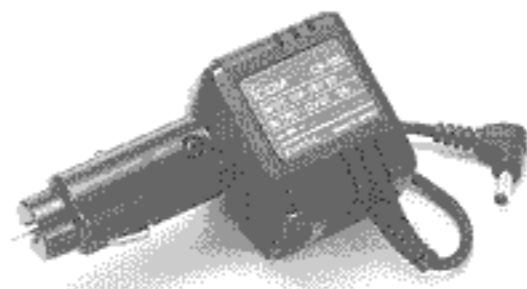

CP-12L



OPC-254L



MB-68

Icom Inc.

6-9-16, Kamihigashi, Hirano-ku, Osaka 547-0002, Japan Phone: 06 6793 5302 Fax: 06 6793 0013

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service>
Phone: (425) 454-7619

Icom Canada

3071 #5 Road, Unit 9, Richmond, B.C., V6X 2T4, Canada
Phone: (604) 273-7400 Fax: (604) 273-1900
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.C.N. 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S a

Zac de la Plaine, Rue Brindejont des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : <http://www.icom-france.com>



Certificate Number Q14190

Icom Inc. (Japan), is an
ISO9001 certification
acquired company.

Your local distributor/dealer: